



WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

GENERAL

This product contains a light source of energy efficiency class D to Regulation (EU) No. 2019/2015 and (UK) 2021 No. 1095.

Clean the external surfaces with a damp cloth using a mild solution of detergent and warm water only, do not use aggressive cleaning products or solvents which may damage the product.

This product contains a non-replaceable LED light source.



Clean the external surfaces with a damp cloth using a mild solution of detergent and warm water only, do not use aggressive cleaning products or solvents which may damage the product.

Do not use any source of high-pressure washers to maintain or clean this luminaire.

This product is non-dimmable.

This product should be dismantled for disposal when it reaches the end of its life. Please see website for dismantling instructions. This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

WARRANTY

This product has a warranty of 5 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place

of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

SUPPLIED BY: (UK)

ML ACCESSORIES LTD, UNIT E CHILTERN PARK,
BOSCOMBE ROAD, DUNSTABLE LU5 4LT,
WWW.MLACCESSORIES.CO.UK

(EU) AUTHORISED REPRESENTATIVE
SLV LIGHTING GROUP,
DAIMLERSTRASSE 21-23,
52531 ÜBACH-PALENBERG, GERMANY
EMAIL: EPREL@GROUP.SLV.COM
MADE IN CHINA



INSTALLATION & MAINTENANCE MANUAL

WPCWA

JBAN24_V1



GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following product:
WPCWA

SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- This product should be installed in the upright position
- Do not overload this accessory or subject it to conditions outside its rating
- This product is Class II double insulated
- This product is IP65 rated

INSTALLATION

- Note - If this luminaire is being used in conjunction with an external PIR or sensor, please confirm with the manufacturer of the sensors that they are compatible with LED luminaires.
- Provide power to the required point of installation (refer to BS7671 for correct cabling methods). Suitable IP rated junction boxes should be used where required
 - The power source connections should be local and accessible via a suitable IP rated enclosure
 - Round cable should be used for the mains supply. The use of flat cable will cause water ingress to the fitting
 - Unscrew the four front screws to gain access (see Fig. 1)




Fig. 1

- Using the back plate as a template, mark the location for, and drill the fixing holes ensuring not to infringe with any gas/water pipes or electrical cables
- For side cable entry, drill out one of the 20mm drilling guides on the side of the fitting and fit a suitable external grommet or compression gland (not included)
- Feed the mains cable through the back of the casing or side, using a rubber grommet to retain IP rating, and secure the baseplate to the surface (see Fig. 2)




Fig. 2

- For surface mounted wiring, a suitable IP rated gland can be used to feed through the side of the backplate
- Connect the luminaire to the mains supply ensuring the correct polarity is observed (see Fig. 3): L – Live (brown), E – Earth (green/yellow), N – Neutral (blue). The earth terminal is non-functional and only provided for convenience. Two cables can be inserted into the push-fit terminal block in order to achieve loop-in/loop out wiring

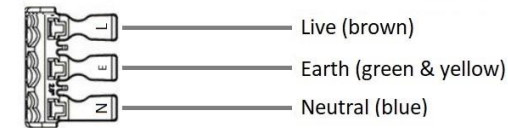


Fig. 3

- Secure the mains cable under the cable clamp and refit the terminal cover
- Select the required colour temperature via the three-position switch on the rear of the luminaire and required wattage on two-position switch
- The sensor will be attached via the plug within the fitting, if the sensor is not required, this can be unplugged

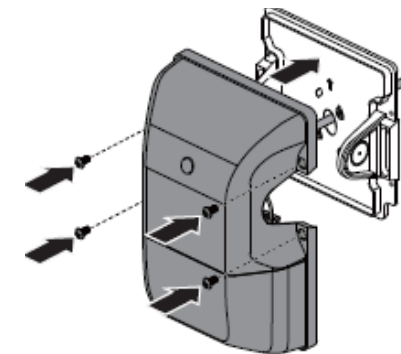


Fig. 4

- Switch on and check for correct operation