

Ceiling Speaker Installation

Item ref: 952.261UK & 952.262UK




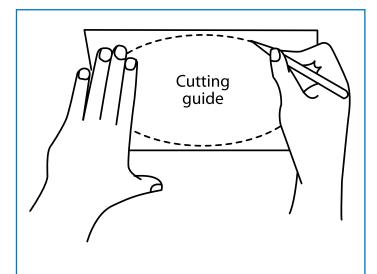




Position the cutting guide against the ceiling where you intend to install the speaker and trace around it.


2. Cut out the treed area using a pad saw or other suitable tool.

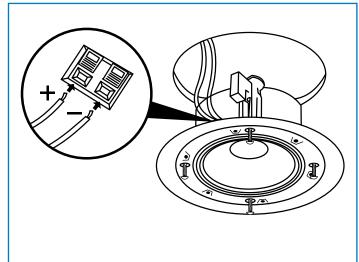


3. Take the speaker unit out of the packaging and remove the grille. Connect the speaker wires to the appropriate "+" and "-" connections (select the desired tappings for 100V units).

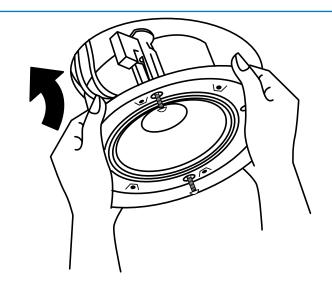

4. Install the speaker unit into the cut-out, ensuring that the 4 dog-ear mounts are turned inwards.

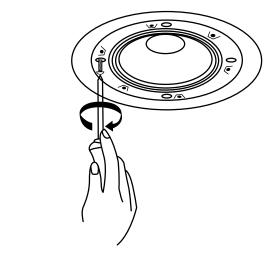

5. Once in place, turn the 4 fixing screws clockwise. This will cause the dog-ear clamps to rotate outwards and tighten to hold the unit in place.

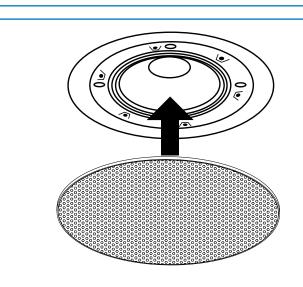

Place the speaker grille back onto the speaker, it will fix magnetically.