



DATASHEET

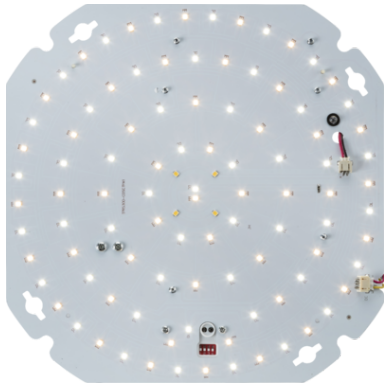

TNXTPEM

TENAX 230V Wattage and CCT Adjustable Emergency LED Gear Tray with Daylight Sensor

www.mlaccessories.co.uk



MLA PART CODE	TNXTPEM
DESCRIPTION	TENAX 230V Wattage and CCT Adjustable Emergency LED Gear Tray with Daylight Sensor
NET WEIGHT (KG)	0.33
DIMENSIONS (MM)	Length - 233 Height - 233
CONSTRUCTION	Construction - Aluminium
CLASS	II
IP RATING	IP20
WATTAGE (W)	10/15/20
LAMP TECHNOLOGY	SMD LED
LUMENS (LM)	1360/1480/1405, 1905/2090/1960, 2345/2630/2415
LUMEN TOLERANCE	5%
EFFICACY (LM/W)	151/147/141
LUMENS EMERGENCY MODE (LM)	125
CIRCUIT WATTAGE (W)	9.7/14.3/18.6
CCT	3000/4000/5700K
LIGHT COLOUR	CCT
CRI	>85
SDCM	<6
RUNNING CURRENT (A)	0.049/0.067/0.085
DISPLACEMENT FACTOR	>0.7
SVM	0.69
PST-LM	0.36
BEAM ANGLE (DEGREES)	120
L70B50 LIFESPAN (HRS)	40,000
DIMMABLE	No
EMERGENCY	Maintained / Non-maintained (not Switched)
OPERATING TEMPERATURE	-20~35°C
INPUT VOLTAGE	230V 50Hz

DRIVER	DRIVER TYPE - Constant Current MAX. OUTPUT - 18W OUTPUT CURRENT - 360mA POWER FACTOR - 0.96 EFFICIENCY FULL LOAD - 0.89 ISOLATION - SELV AMBIENT TEMPERATURE (Ta) - -20~50°C CASE TEMPERATURE (Tc) - 85°C
SENSOR TYPE	Photocell
SENSOR LUX SETTINGS	5-25lx - 200-400lx
BATTERY INCLUDED	Yes
WARRANTY	5year(s)
WARRANTY INFORMATION	including battery
ORIGIN OF MANUFACTURE	China
DECLARATION OF CONFORMITY (HELD ON FILE)	Yes
EAN	5056270856255

Date Created: 28/02/2025 00:58

